


DESCRIPTION

To improve movement quality the MINIROTATORS are motorized with DC-Motor.


A simple solution with DC GearMotor is proposed: the module is a small, front panel mounted, low price motor driver.

VACUO DC-Controller is designed to drive 24V DC Gearmotor (I_{max} 4A). Housed in a rack metal case the device is very easy to use. Universally rated to ensure voltage compatibility, the controller is fully compliant with EMC regulations.

The controller provides a bi-directional output to drive a single axis motorized in either direction. Spin direction is triggered by a electronic shunter. Speed motor is selected by a 10-turns potentiometer.

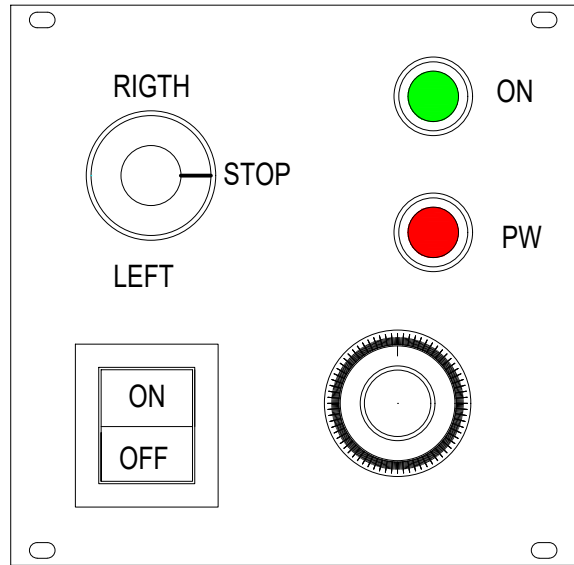


DC Motor Controller

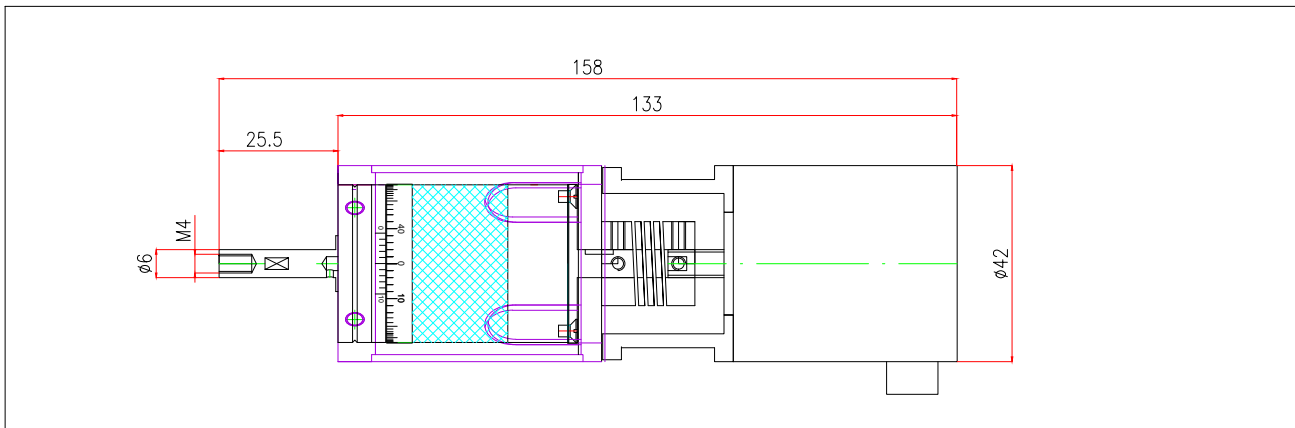


OTHER MOTORS

Considering the fast evolution of the motors and the large number of models we suggest to contact our staff to solve your requirements.

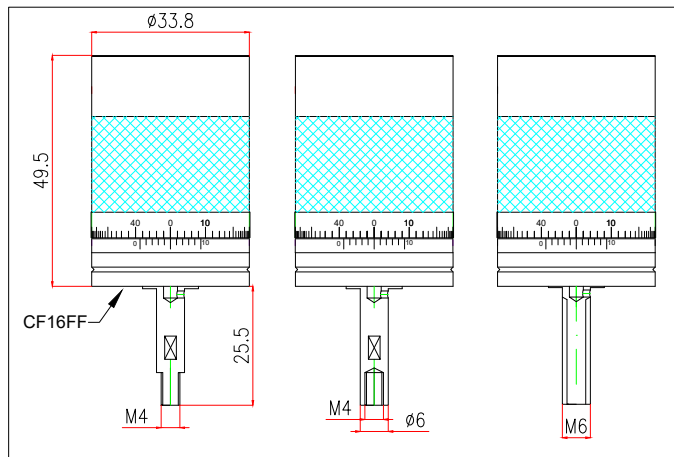

Drive rod is removable , so customer's solutions are possible at the same price.

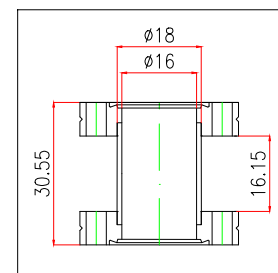

Standard nipple CF16